


# 30.5 mm Push Buttons

Type 4/13, Watertight/Oiltight

## 3-Position Selector Switch Units, Non-Illuminated



Standard Knob Operator  
Cat. No. 800T-J2A




Knob Lever Operator  
Cat. No. 800T-J17A



Metal Wing Lever Operator  
Cat. No. 800T-JG11A

Contact Type	Operator Position			Operator Type M = Maintained S = Spring Return	Standard Knob	Knob Lever	Metal Wing Lever
					Cat. No.	Cat. No.	Cat. No.
No Contacts	—	—	—	M M M	800T-J2	800T-J17	800T-JG11
				S→M M	800T-J4	800T-J18	800T-JG15
				M M←S	800T-J5	800T-J19	800T-JG16
				S→M←S	800T-J91	800T-J20	800T-JG141
	O	O	X	M M M	800T-J2A	800T-J17A	800T-JG11A
	X	O	O	S→M M	800T-J4A	800T-J18A	800T-JG15A
				M M←S	800T-J5A	800T-J19A	800T-JG16A
				S→M←S	800T-J91A	800T-J20A	800T-JG141A
	O	O	X	M M M	800T-J2B	800T-J17B	800T-JG11B
	X	O	O	S→M M	800T-J4B	800T-J18B	800T-JG15B
	O	O	X	M M←S	800T-J5B	800T-J19B	800T-JG16B
	X	O	O	S→M←S	800T-J91B	800T-J20B	800T-JG141B

Note: X = Closed/O = Open

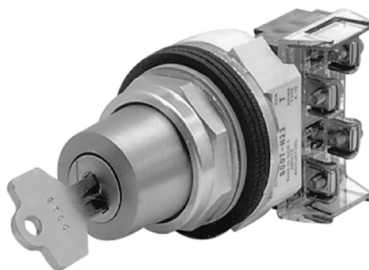

3-Position Cylinder Lock Operator  
Cat. No. 800T-J41A

Contact Type	Operator Position			Operator Type M = Maintained S = Spring Return	Cylinder Lock		
					Key Removal — Left ①	Key Removal — Center ①	Key Removal — All ①
					Cat. No.	Cat. No.	Cat. No.
No Contacts	—	—	—	M M M	800T-J41	800T-J42	800T-J44
				S→M M	—	800T-J50	—
				M M←S	800T-J69	800T-J38	—
				S→M←S	—	800T-J631	—
	O	O	X	M M M	800T-J41A	800T-J42A	800T-J44A
	X	O	O	S→M M	—	800T-J50A	—
				M M←S	800T-J69A	800T-J38A	—
				S→M←S	—	800T-J631A	—

Note: X = Closed/O = Open

① Key removable in maintained positions only.

Accessories — Page 10-37

Legend Plates — Page 10-48

Approximate Dimensions — Page 10-51

