


DRIVE-ON LIFT TABLES


1,000/2,000/4,000 LBS




OPTIONS

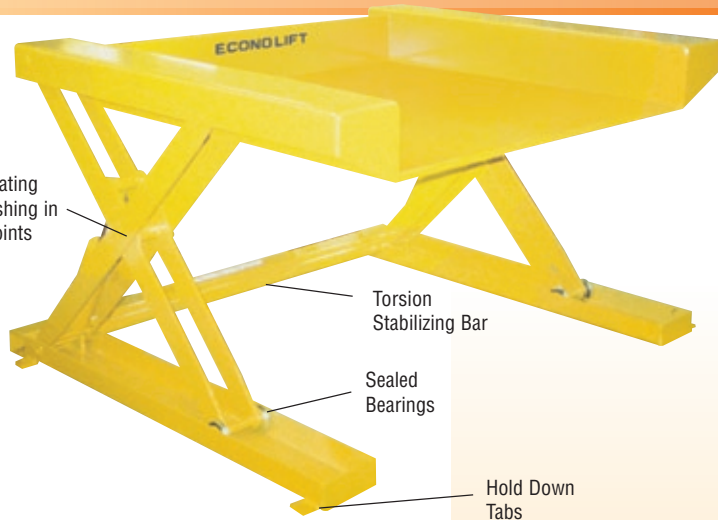

DRIVE THRU LOADING DOCK

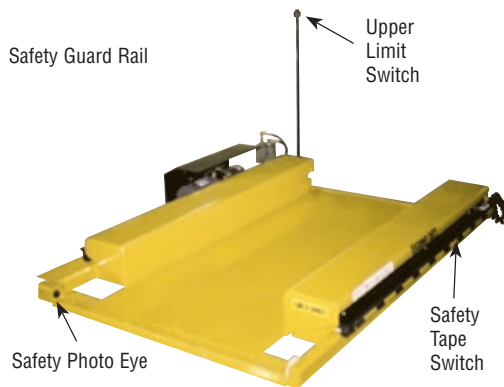

DRIVE THRU LIFT TABLE

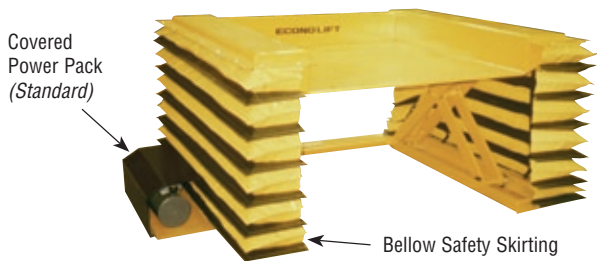

DRIVE THRU PORTABLE LIFT TABLE

TRAVEL

- 30", 38"

SAFETY

- Velocity fuse on each cylinder to eliminate tables from collapsing due to hose failure.
- Hold down tabs on all four corners.

LOWERED HEIGHT OF TABLE

- Floor level

POWER SUPPLIES

A/C 115 volt, 1H.P.

(standard)

- Single phase motor (hand or foot operated controls standard)

A/C 220/460/575 volt, 1H.P.

- Three phase motors (optional hand or foot operated controls available)

Air/Hydraulic (standard)

- Foot operated (hand held pendant available)

OPTIONS

- Different platform sizes
- Bellow safety skirting / safety touch bars
- Vertical travel - high or lower
- Limit switches / photo eyes
- Eye bolts - for moving lifts easily
- Drive through c/w flip down plate
- Semi-portable c/w dolly handle

MODEL NO.	CAPACITY (LBS.)	PLATFORM SIZE W ₁ x L ₁ (IN.)	LOW'D HEIGHT TP (IN.)	VERTICAL TRAVEL H ₂ (IN.)	OVERALL SIZE W ₃ L ₂ (IN.)	PONTOON LOW'D HEIGHT H ₁ (IN.)	OVERALL HEIGHT H ₃ (IN.)
DO-SL 30-10	1,000	44 x 50	3/8	30	62.5 x 57	8	38
DO-SL 30-20	2,000	44 x 50	3/8	30	62.5 x 57	8	38
DO-SL 30-40	4,000	44 x 50	1/2	30	62.5 x 57	9	39
DO-SL 38-10	1,000	48 x 60	3/8	38	64 x 64	8	46
DO-SL 38-20	2,000	48 x 60	3/8	38	64 x 64	8	46
DO-SL 38-40	4,000	48 x 60	1/2	38	64 x 64	9	47